






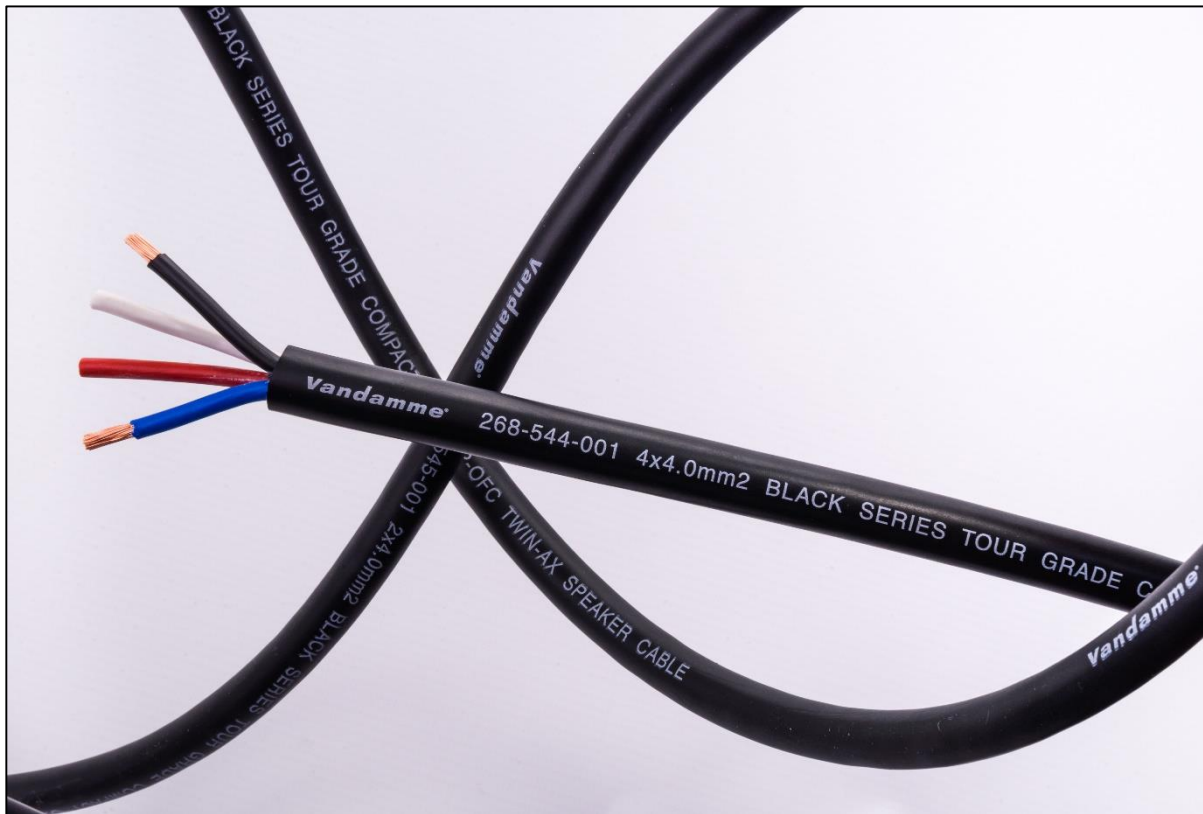

HEAR NO EVIL

VAN DAMME BLACK SERIES REDUCED OD TOUR GRADE SPEAKER CABLE



The Van Damme Reduced OD speaker cable range comprises 2 and 4 core 4 mm² cables engineered to have the lowest possible overall diameter. They are commonly used with speaker multipins for amplifier break ins or speaker breakouts, and also help keep truck weight down. Please note that these cables are double extruded; the first extrusion encloses the inner conductors and the second extrusion gives a smooth and round outer jacket.

KEY BENEFITS	MATERIALS	APPLICATIONS
 <p>Reduced diameter</p>  <p>Flexibility</p>	 <p>Oxygen Free Copper</p>  <p>Flexible PVC</p>	 <p>Presentations</p>  <p>Live Sound</p>

HEAR NO EVIL

Applications

- Matt black jacket for on stage use
- Reduced overall diameter for speaker multipin breakouts, more compact cabling and less weight
- 4.00 mm² conductors for high power speakers and subs

Application Notes

- Optimised for dynamic use
- Double extruded jacket for a smooth, round outer jacket
- Ultra-pure oxygen free copper for outstanding sonic integrity

General Specification

Conductor	Bare ultra-pure oxygen free copper
Insulation	PVC
Colour code	Red, Blue, Black, White
Jacket	Flexible PVC composite Jet Black RAL 9005
Working Voltage	300/500 V
Bend Radius	10 x overall diameter
Operating temperature	-20 to +70 °C

Characteristics by part number

Part Number	Conductor Size	Overall Diameter	Stranding	Resistance Ohm/km
268-545-001	4.00 mm ²	9.80	56 x 0.31 mm	4.50
268-544-001	4.00 mm ²	11.20	56 x 0.31 mm	4.50

Part Numbers and Description

Part Number	Description	Max. Reel Length
268-545-001	Van Damme Black Series Reduced OD 2 x 4.00 mm ² twin-axial	500 m
268-544-001	Van Damme Black Series Reduced OD 4 x 4.00 mm ² multicore	500 m

Standards and Compliance

RoHS 2011/65/EU	Restriction of Hazardous Substances
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals